

Catalog #:	
Project:	
Type:	Date:
Notes:	

UFO Led Highbay Light



HB11 150W



HB11 240W



Key Features

OPTICS:

- HB11B series Light engines are available in standard 5000K configurations.

ELECTRICAL:

- Input voltage: AC120-277V&277-480V
- 0-10V dimming
- THD: ≤20%, Power Factor: ≥0.9

CONTROLS:

- Optional for motion sensor

INSTALLATION:

- With ring for hang install.
- With U bracket for wall or pipe install.

LIFESPAN:

- Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

LISTINGS:

- DesignLights Consortium® (DLC) Premium qualified and DLC qualified.
- UL listed for wet locations.
- Rated for ambient operating temperature -40°F to 122°F (-40°C to 50°C).

Optional Accessories



Motion Sensor



Sensor Remote



Surface Mount Bracket

APPLICATION:


- Widely use in warehouse, factory, workshops, exhibition hall, Gymnasium and supermarkets, etc

Catalog #:	
Project:	
Type:	Date:
Notes:	



Model No	Power (W)	Voltage	CRI	5000K		Dimension	Weight (lbs)
				Lumens	Efficacy		
ML-HB11-100WRXYD1	100W	AC120-277V	>80	14000LM	140LM/W	Ø11.8x6.6"	7.4
ML-HB11-150WRXYD1	150W	AC120-277V	>80	21000LM	140LM/W	Ø11.8x6.6"	7.5
ML-HB11-150WRXYD1-W(White color)	150W	AC120-277V	>80	21000LM	140LM/W	Ø11.8x6.6"	7.5
ML-HB11-240WRXYD1	240W	AC120-277V	>80	33600LM	140LM/W	Ø14.2x7.4"	10.56
ML-HB11-240WRXYD1-MS(With Sensor)	240W	AC120-277V	>80	33600LM	140LM/W	Ø14.2x8.1"	10.56
ML-HB11-240WS1BT2H1-BH50	240W	AC277-480V	>80	33600LM	140LM/W	Ø14.2x7.4"	10.56

Dimensions


100W/150W

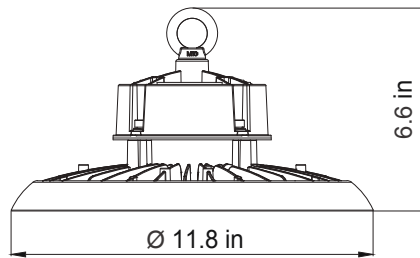

240W

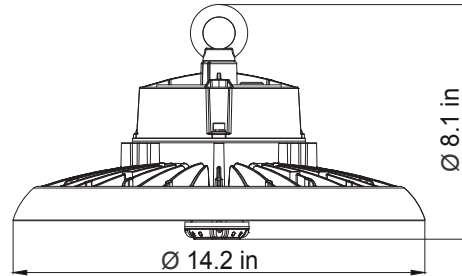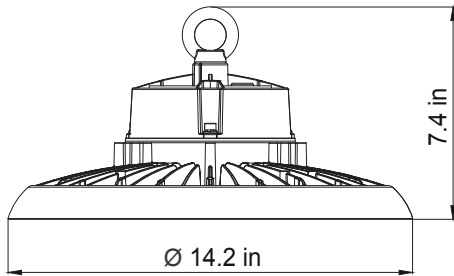

Installation Diagram

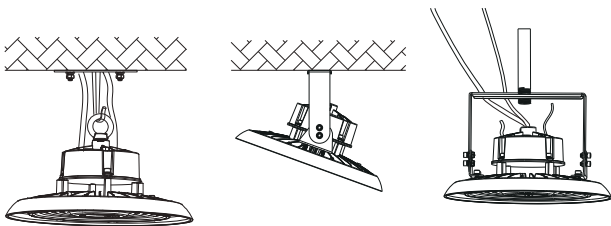

Distribution Diagram

