

|           |       |
|-----------|-------|
| Catalog # |       |
| Project:  |       |
| Type:     | Date: |
| Notes:    |       |

## Single Pin LED T8 Tube Light



### Key Features

- Safe & easy to install
- Energy-efficiency

### Optics

- Housing material: 6063-T5
- Base Type: FA8
- Beam Angle: 120°
- CRI: .80Ra

### Electrical

- Available for Single Ended Power or Double Ended Power
- THD: <20%

### Listings

- Temperature Range: -4°F to 104°F
- Suitable for damp locations
- Suitable to use in UL approved enclosed fixtures


### Applications

- Offices
- Hallways
- Warehouses

| Model Number      | Length | Wattage | CRI | Lumens | CCT | Lens    | Voltage  |
|-------------------|--------|---------|-----|--------|-----|---------|----------|
| ML-T8-8-45W-F-5K  | 8'     | 45W     | >80 | 5400Lm | 5K  | Frosted | 100-277V |
| ML-T8-8-45W-C-65K |        |         |     |        | 65K | Clear   | 100-277V |


## LED T8 Tube Light

### PRODUCT DIMENSIONS

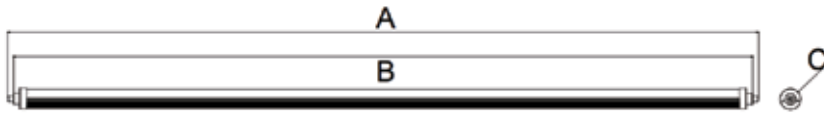

| Maximum Overall | A      | B      | C    |
|-----------------|--------|--------|------|
| 8FT             | 94.02" | 93.35" | 1.1" |

### MOUNTING GUIDES

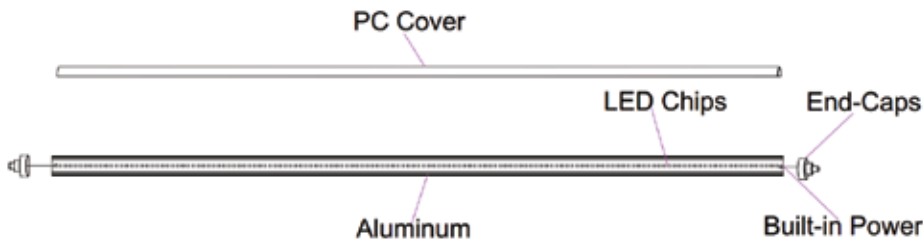

### USAGE PRECAUTIONS

#### Cut off the power supply before installing, in case of high voltage electric shock.

1. Protection Level is IP20; tubes should avoid heat source, water vapor & corrosive environment.
2. Please use with tubes of compatible electronic ballast. Specific models please consult supplier or professionals.
3. If pins are damaged, first it should be cut off the AC, replaced by the related professionals, in order to avoid danger such as short circuit or electric spark.
4. Please tear off the lamp surface protective film before installation. Refer to installation instructions. Make sure that contact is secure with holder.
5. No matter the circumstances, tubes surface cannot cover insulating materials or similar materials.
6. Non-professionals are not allowed to open and outfit LED tubes. Avoid touching surface when the tube light on.



#### ELECTRIC SHOCK WARNING

Ensure the power supply has been cut off before connecting the wiring.  
All wiring and installation of this product is required to be done by professionals.