

Catalog #:	
Project:	
Type:	Date:
Notes:	

# Led rotatable wallpack light



## Key Features

### OPTICS:

- RWP01B series Light engines are available in standard 4000K, 5000K and 5700K configurations.
- 60 beam angle.

### ELECTRICAL:

- Input voltage: 120-277V
- THD: ≤20%, Power Factor: ≥0.9.

### CONTROLS:

- with junction box mount.
- Easy installation with integrated level bubble and hinged door.

### INSTALLATION:

- Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.



### LISTINGS:

- DesignLights Consortium® (DLC) Premium qualified and DLC qualified.
- UL listed for wet locations.
- Rated for ambient operating temperature -22°F to 113°F (-30°C to 45°C).



Model No	Power (W)	Voltage	CRI	5000K		Dimension	Weight (lbs)
				Lumens	Efficacy		
ML-RWP01B-40WH1CYT1SA1-BR50	40W	120-277V	>70	5800lm	145lm/w	9.4×6.5×5.9"	3.8
ML-RWP01B-80WW1CYT1SA2-BR50	80W	120-277V	>70	11360lm	142lm/w	9.4×10×5.9"	5.9

## Dimensions


40W



80W

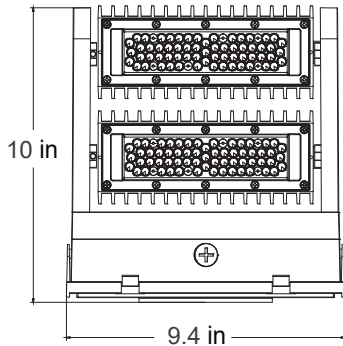

## Installation Diagram

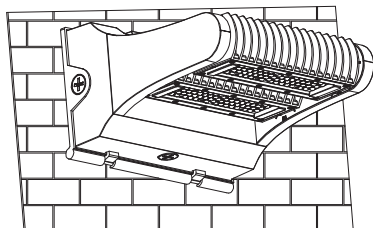

## Distribution Diagram

