



Key Features

- High end look
- Cloud series LED troffer gives >140Lm/W
- Cloud series troffer can work with emergency power pack
- Beam Angle 120°

Optics

- Color temperature optional
- 3 power options
- Dimming: 0 -10V

Electrical

- Input voltage: AC100-277V
- THD: ≤10%
- Power Factor: ≥0.95
- Operating Frequency 50/60Hz

Listings

- Color Temperature: 3k-5K
- Ambient Temperature Range: -4°F - 113°F
- IP Rating: IP40

Applications



- Doctor & Dental Offices
- Office Parks

Model Number	Length	Wattage	CCT	Lumens	Voltage	Dimming
ML-PN2*2-Q01-K40-3050	2'x2'	Selectable 20W/30W/40W	Selectable 3K/4K/5K	140Lm/W	100-277V	0-10V
ML-PN2*4-Q01-K60-3050	2'x4'	Selectable 40W/50W/60W				

WARNINGS


- Make sure all the power is off before installation.
- All installations are required to be done by professionals.

WIRING DIAGRAM

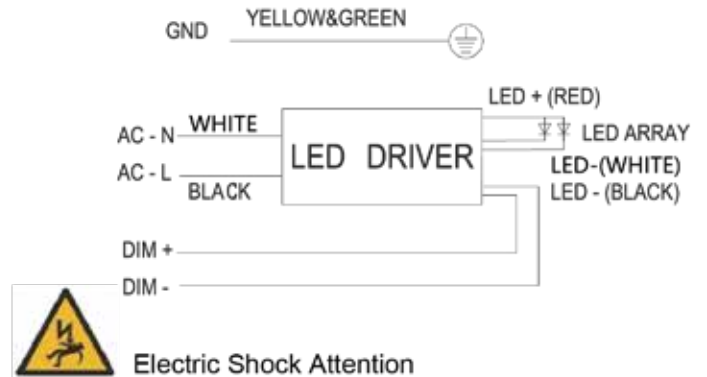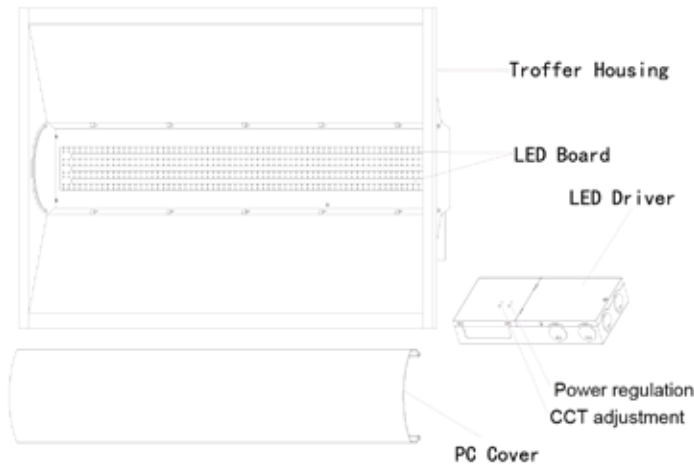

Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

INSTALLATION INSTRUCTIONS

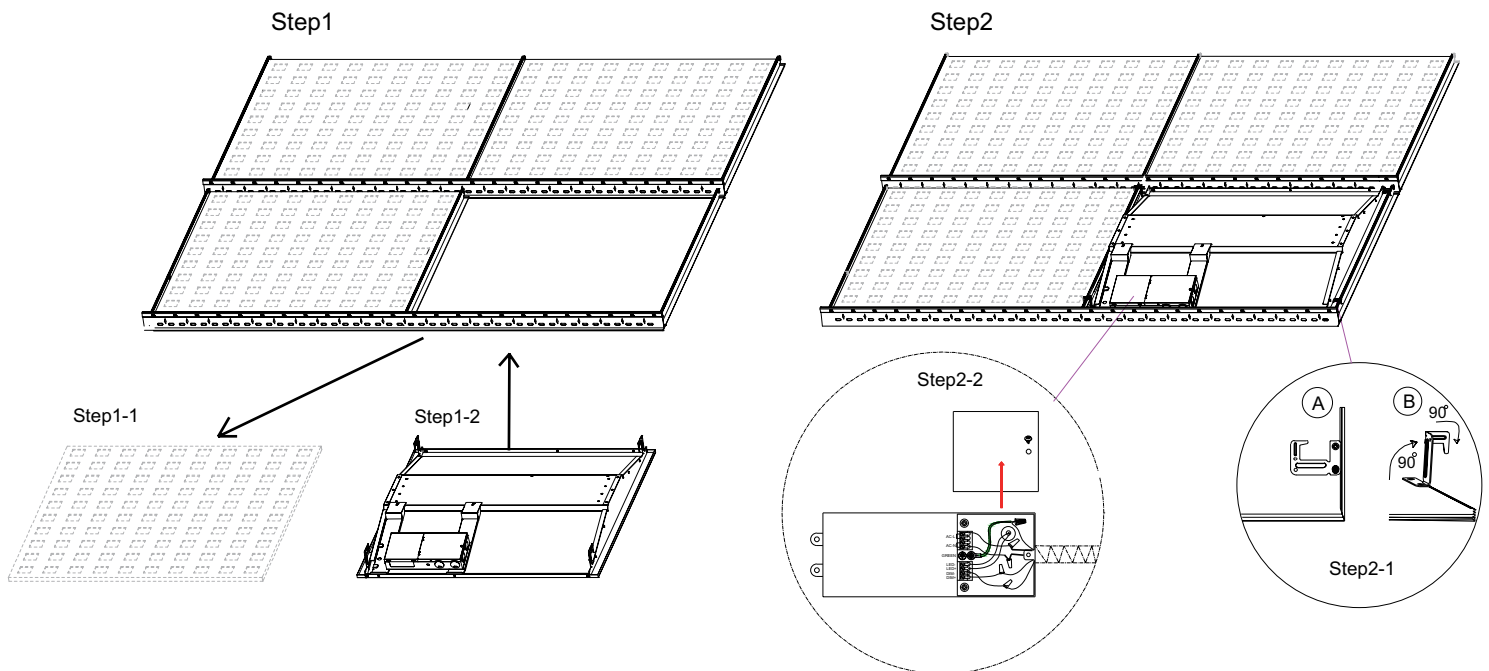

Step 1: Make sure of all the power is off before installing. Remove the one ceiling tile that you need to install light fixture on. Then place the light fixture on the T-bar carefully and make sure it is correctly in place and secure.

Step 2: Lift the 4 buckles on the back of the panel up by 90° then bend the top part of the buckles 90° towards the direction where you can anchor the light fixture to the T-bar.

Step 3: Open the driver's junction box and connect the AC wire to the driver correctly (L=black & N=white)