

Catalog #	
Project:	
Type:	Date:
Notes:	

LED UFO Highbay



Key Features

- Safe & easy to install with ring for hang install or U bracket for wall or pipe install

Optics

- UHB18B/UHB23 series light engines are available in 3 CCTs & 3 Wattage selectable configurations

Electrical

- Input Voltage: 120-277V
- Dimming: 0-10V
- THD: $\leq 20\%$
- Power Factor: ≥ 0.9
- Temperature: -40°F to 122°F

Lifespan

- Estimated 50,000 Hours LED lifespan based on IES LM-80 results and TM-21 calculations

Listings

- UL Listed: Wet Locations

Applications

- Warehouses
- Factories
- Supermarkets
- Exhibition Halls

Optional Accessories



Motion Sensor
ML-UFO-MS



Sensor Remote
ML-HB-R-MS



Surface Mount Bracket:
100W-150W-UFO Bracket & 240W-UFO Bracket




Emergency Driver:
ES-EIB301S


SPECIFICATIONS

Model Number	Wattage	CCT	Lumens	Housing	Voltage	CRI
ML-HB11-100WRXYD1	100W	N/A	14,000	Black	100-277V	>80
ML-HB18B-150WL1XYA1-W	Selectable 100W/120W/150W	Selectable 35K/4K/5K	140Lm/W		White	
ML-HB18B-150WL1XYA1				Black		
ML-HB18B-240WL1XYA1-W	White			277-480V		
ML-HB18B-240WL1XYA1	Black					
ML-HB23-300WXL1XYA1	Selectable 200W/240W/300W		149Lm/W	Black		
ML-HB23-150WL1XYH1-48	Selectable 100W/120W/150W		153Lm/W			
ML-HB23-240WL1XYH1-48	Selectable 200W/220W/240W					

DIMENSIONS

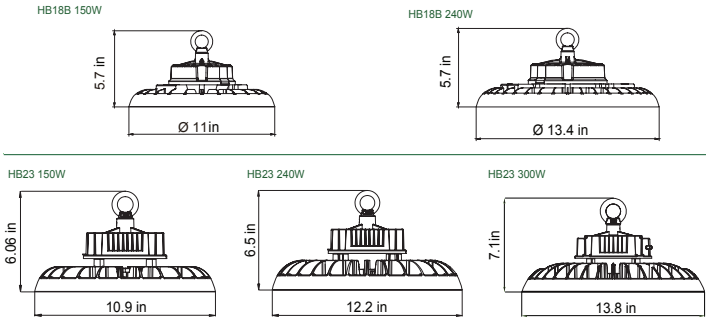


INSTALLATION DIAGRAM

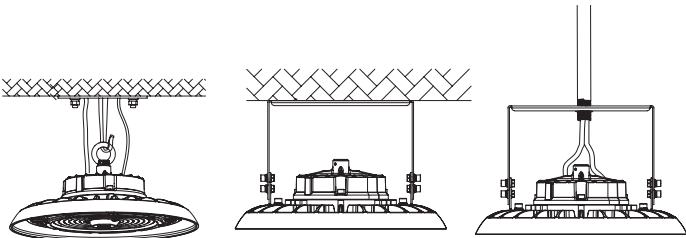

DISTRIBUTION DIAGRAM

Luminous Intensity Distribution Curve

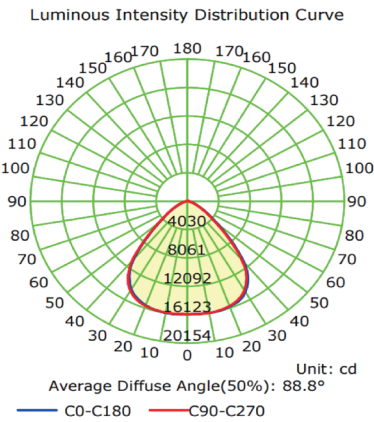

Illuminance at a Distance

