

15', 20' & 25'



Key Features

- Grade B: Minimum yield strength of 46K PSI
- Finish: Textured architectural bronze powdercoat finish, baked to ensure maximum paint adhesion, hardness and durability
- Anchor Bolts: Included, refer to chart on back for correct size
- Hand Hole: Cast iron reinforced hand hole and cover with ground screw
- Base Cover: Poles are provided with a two-piece formed steel base cover that is easily assembled and fitted over pole base

Listings


- Conforms to ASTM-A 500

Mounting Options

- Standard length poles include 2" OD tenon, side drilled 4@90°, polycarbonate top cover & hole plugs for unused drilling locations
- Standard poles include a 2.5" top adapter with no top opening. For arm-mounted installations, the top adapter is removed, side wall openings are added, and the top is sealed with a plastic rain cap.

Applications

- Retail centers
- Industrial parks
- Schools
- Public transit
- Airports
- Office buildings
- Medical facilities

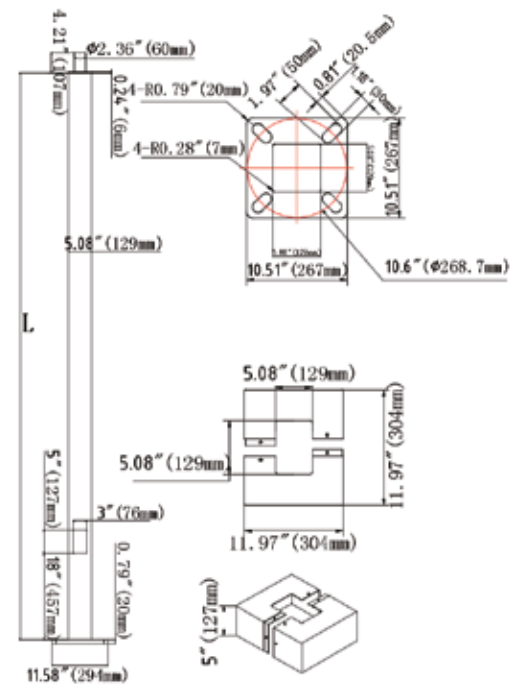

SPECIFICATIONS

Model Number	Height	Wall Thickness	Shaft Size	Base Size	Bolt Circle	Bolt Projection	Bolt Size	Pole Weight	EPA 70	EPA 80	EPA 90	EPA 100	EPA 110	EPA 120
ML-15FT4-11G-D-T	15'	11 Gauge	4"x4"	11"	8" -11"	2.75"	3/4"x17"x3"	117lbs	15.2	12.5	10.1	8.5	6.9	5.4
ML-20FT4-11G-D-T	20'							152lbs	9.2	7.3	6	4.2	3	1.6
ML-25FT4-11G-D-T	25'							190lbs	8.9	6.9	5.7	4.1	3.6	2.2

NATIONAL WIND VELOCITY MAP

