

CCT & Wattage Selectable



Key Features

- Easy to install & operate
- Instant start
- No flickering or humming
- Eco-friendly
- Light is soft & uniform
- Photocell optional

Lifespan

- Estimated 50,000 hours LED lifespan based on IES LM-80 results & TM-21 calculations

Optics

- Engines are available in standard CCT Selectable 3K/4K/5K & Wattage Selectable 100W/120W/150W or 200W/240W/300W

Listings

- UL Listed: Wet locations

Electrical

- Input voltage: 120-277V
- Dimming: 0-10V
- THD: $\leq 20\%$
- Power Factor: ≥ 0.9
- Temperature: -22°F to 122°F


Applications

- Workshops
- Factories
- Parks
- Outdoor sports courts & fields
- School playgrounds


Model Number	Wattage	CCT	Lumens	CRI	Dimmable	Voltage	Bracket
ML-FL19-150W	Selectable 100W/120W/150W	Selectable 3K/4K/5K	140Lm/W	>80	0-10V	120-277V	Yoke
ML-S-G18-300WXYA1-YM	Selectable 200W/240W/300W	Selectable 3K/4K/5K					

DIMENSIONS

150W

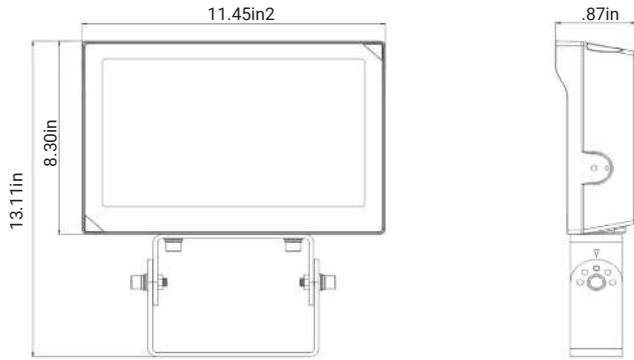


300W

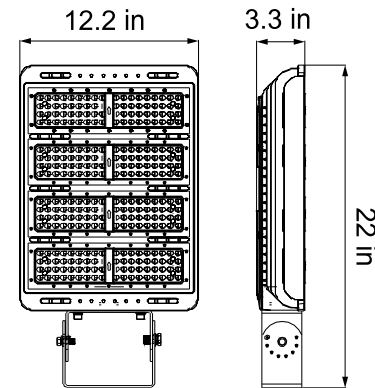


INSTALLATION DIAGRAM

150W




300W



DISTRIBUTION DIAGRAM

Luminous Intensity Distribution Curve

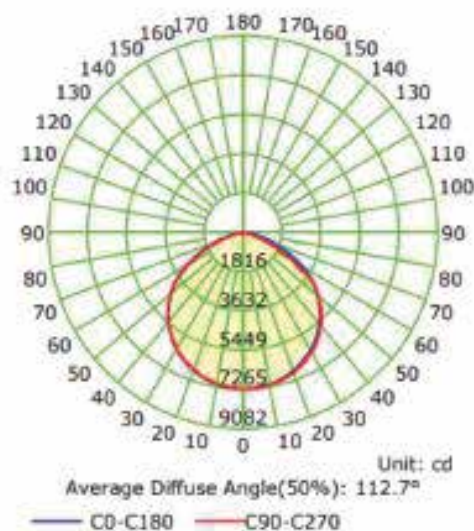

Illuminance at a Distance

