



Key Features

- Energy-efficient
- Environmentally friendly
- Safe & easy to install
- Ballast compatible (Plug & Play)
- Single & double ended connection

Optics

- Material: Aluminum + PC
- Base Type: G13

Electrical

- Voltage: AC100-277V
- Low shock risk

Lifespan

- Estimated 50,000 hours

Listings


- Operation Temperature: -4°F to 104°F
- Environment: Dry, Damp

Applications

- Grocery Stores
- Hardware Stores

Model Number	Length	Wattage	Lumens	CCT	Lens
ML-T8-20P4FT-AB-FMM	4'	Selectable 8W/12W/15W/18W/20W	135Lm/W	Selectable 3K/35K/4K/5K/65K	Frosted
ML-T8-20P4FT-AB-CMM					Clear
ML-T8-48P8FT-AB-FMM	8'	Selectable 25W/30W/35W/40W/45W/48W			Frosted
ML-T8-48P8FT-AB-CMM					Clear

PRODUCT DIMENSIONS

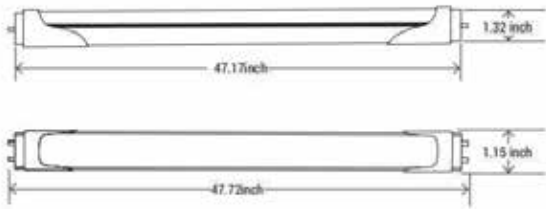

Strict Quality Control System

Each tube 100% inspected before delivery. Every led tube passes High temperature testing; High-Low Input testing; switch testing; pressure testing; electric leakage testing; lightning strike testing and aging testing for 6 hours.




INSTALLATION INSTRUCTIONS

Magnetic Ballast

Professional installation is required


1. Turn off power before installation
2. Remove the traditional starter
3. Replace traditional fluorescent tube with LED tube
4. Switch on electricity and check for lamp starting

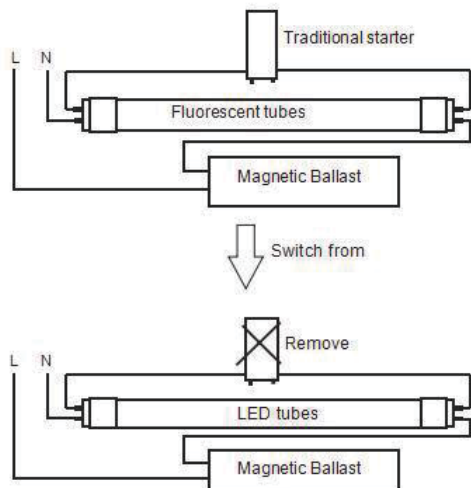

Electronic Ballast

Professional installation is required


1. Turn off power before installation
3. Replace traditional fluorescent tube with LED tube
4. Switch on electricity and check for lamp starting

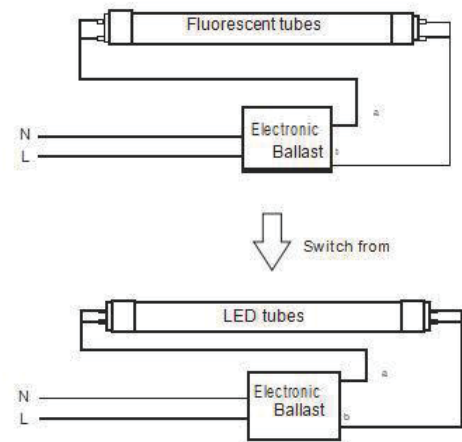




INSTALLATION INSTRUCTIONS

Bypass Ballast Fluorescent Lamps (Type B)

1. Turn off power before installation
2. Cut the wire and bypass ballast
3. Hook up line wires to Tombstone wires as a direct power
4. Attach warning label
5. Switch on electricity and confirm lamp is operating correctly

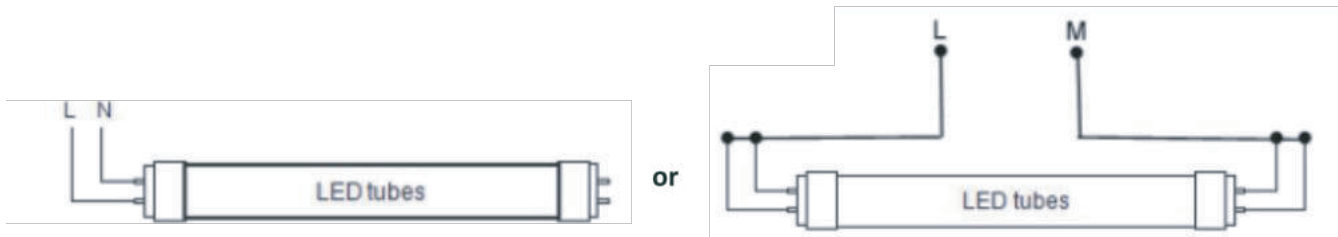

PACKAGING

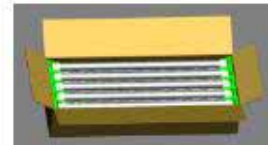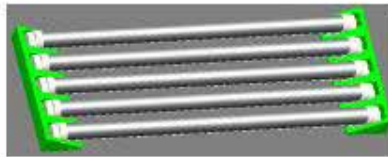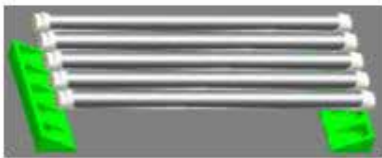

Size	Case	Carton Dimensions	KG/CTN	40HQ
4FT	25 PCS/Case	1.248o.2080.22m	6.35	30,000PCS



Thick Carton



Paperboard Covering



Palleting