



Optics

- Matte cover provides soft lighting
- PHB08G-320W light engines are available in CCT 5K & Wattage Selectable (260W/290W/320W)
- PHB08G-420W light engines are available in CCT Selectable 4K/5K & Wattage Selectable (340W/380W/420W)
- PHB10-220W light engines are available in CCT Selectable (4K/5K) & Wattage Selectable (110W/165W/220W)

Lifespan

- Estimated 50,000 hours

Controls

- Optional Motion Sensor

Listings

- Operation Temperature: -22°F to 122°F
- Environment: Damp locations

Electrical


- Input voltage: 120-277V
- 0-10V Dimming
- THD: $\leq 20\%$
- Power Factor: ≥ 0.9

Applications

- Grocery Stores
- Warehouses
- Factories

Installation Diagram


Same for all models.

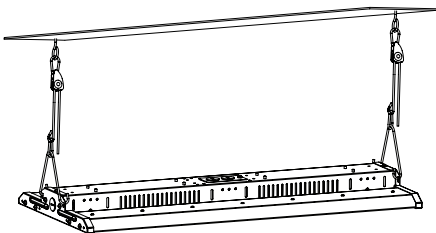


Model Number	Length	Wattage	CCT	Lumens	Voltage
ML-PHB10-220WBML1A2-WH40/50WD	2'	Selectable 110W/165W/220W	Selectable 4K/5K	140Lm/W	100-277V
ML-PHB08G-320WBMP1A1-WHW50K	4'	Selectable 260W/290W/320W	5K		
ML-PHB08G-420WBMP1A1-WHW50K		Selectable 340W/380W/420W	Selectable 4K/5K		

PRODUCT DIMENSIONS

PHB10-220W

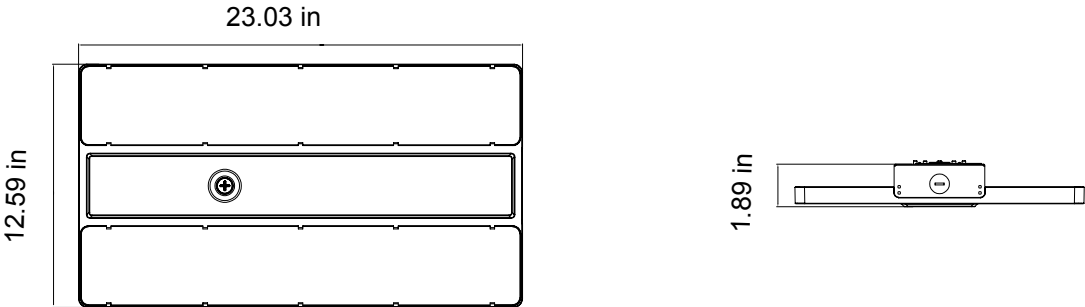


PHB08G-320W & PHB08G-420W

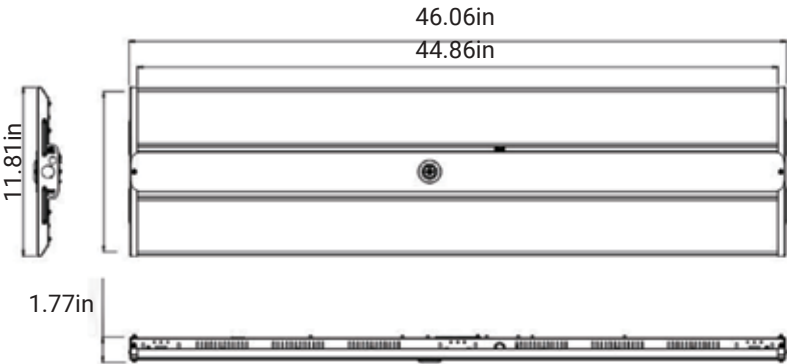

DISTRIBUTION DIAGRAM

Luminous Intensity Distribution Curve

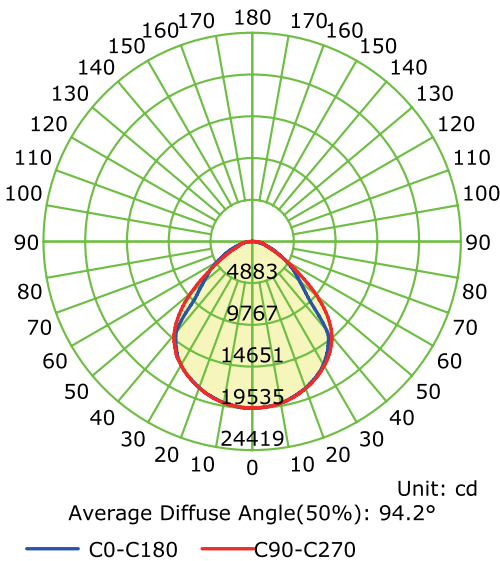

Illuminance at a Distance

