

CCT & Wattage Selectable



Key Features

- The shallow profile wraparound is engineered for general illumination in hallways, corridors, office spaces and commercial or educational facilities.
- To significantly reduce contractor installation time, the J series features factory-installed lamps while fully maintaining the fixture's UL listing.
- Mounting: Ceiling or J-box installation in general applications
- Hanging: optional

Optics

- Made with durable commercial grade steel and plastic materials for long-lasting performance

Listings

- Design Lights Consortium® (DLC) Premium
- Rated for ambient operating temperatures: -4°F - 113°F

Electrical

- Compatible with standard 0-10V dimmer
- Motion sensor optional

Applications


- Offices
- Retail
- Schools
- Restaurants
- Healthcare
- Residential
- Hospitality

Model Number	Length	Wattage	CRI	Lumens	CCT	Dimming	Voltage
ST4F-45PDNC	4'	Selectable 20W/30W/40W	>80	125Lm/W	Selectable 3K/4K/45K/5K/57K/65K	0-10V	100-277V

INSTALLATION INSTRUCTIONS

WARNING: Turn off power at fuse or circuit breaker before installing. Linkable function available from factory.

Step 1: Remove the PC cover

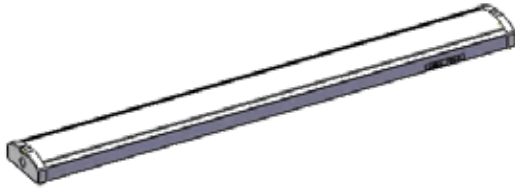


Toolless Access: Removable end caps and a snap-in polycarbonate (PC) lens/cover allow for quick access to internal hardware and wiring. Sensor-equipped models feature a quick-disconnect terminal wire for safe, hassle-free maintenance.

Step 2: Locate mounting holes at both ends of the fixture




Step 3: Anchor Installation

Drill mounting holes using an electric drill.
Insert expansion anchors into the holes and tap until flush.

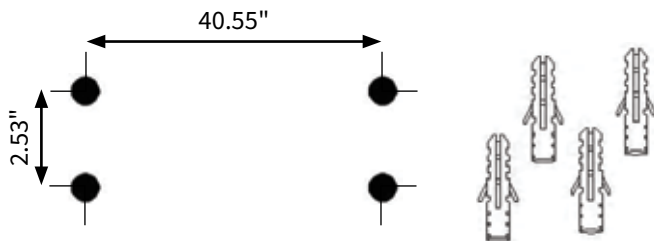

Step 4: Wiring

(L to Live, N to Neutral, G to Ground)

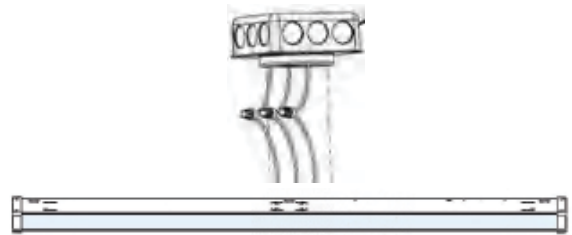

Step 5:

Attach to the remaining four holes



Step 6:

Take the PC cover, install it on one end of the fixture and close clip.




End Clips




Sensor Connector


Connect AC Power Cables to the input side of the terminal L/N/G

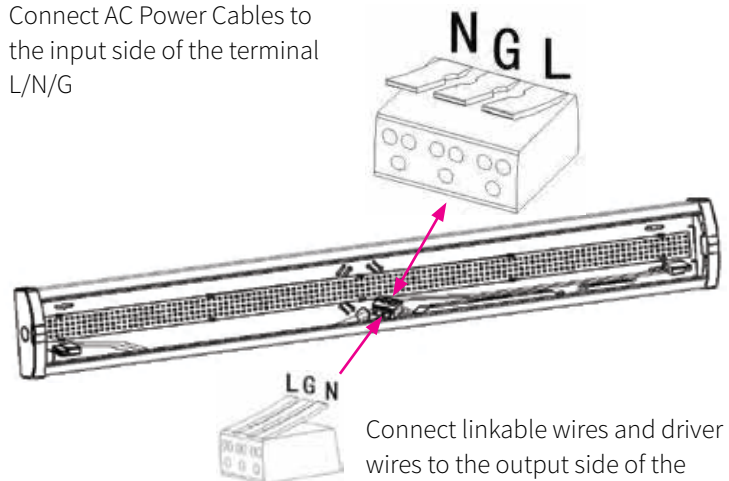

Connect linkable wires and driver wires to the output side of the terminal, L to L, N to N, G to G.

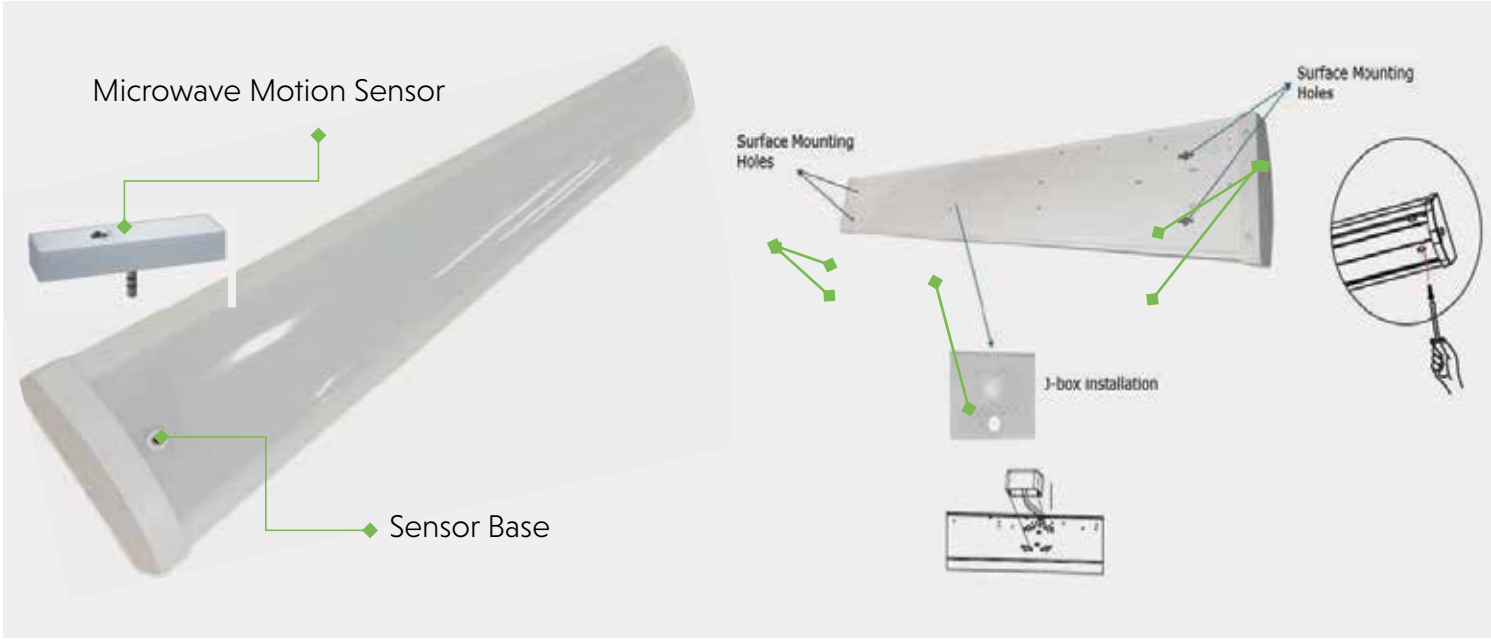

DIMENSIONS

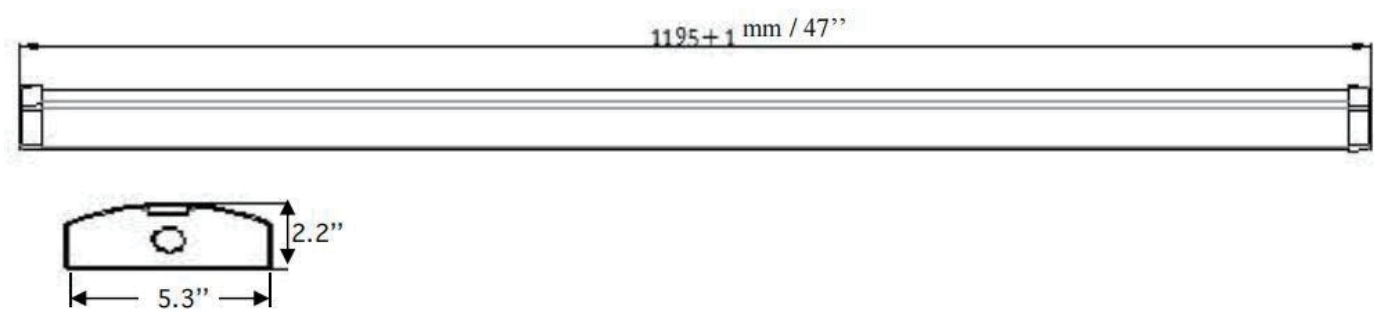

Size	4PCS/CARTON			CONTAINER		
	Dimensions	N.W LBS	G. W LBS	20' GP (PCS)	40' GP (PCS)	40' HQ (PCS)
4'	47.83"x11.81"x5.98"	8.08	10	2024	4416	4912

PACKING INFORMATION



1 Piece per box



4 Pieces per carton

ACCESSORIES



Microwave Sensor

- Frequency: 5.8GHz+/- 75MHz
- Microwave Power:<0.3mW
- Installation Height: 4m/13.12 Max
- Detection Distance:>3m/9ft
- Detection Angle: 30-150 (without glass cover)



Sensor Controller

- Operation Distance Max: 15m/49ft(3V)
- Emission Angle:<30°
- Functions:
 - On/Off
 - Mounting Height
 - Detection Area
 - Daylight Sensor
 - Stand-by Dimming
 - Hold Time
 - Brightness

(Refer to the manual for set up)