



Key Features

- Easy to install
- Long lifespan

Optics

- CLH01 series light engines are available in standard 5K configurations
- Beam Angle: 150°*90°
- Lamp Base: 270° adjustable

Electrical

- THD: ≤20%
- Power Factor: ≥0.9.

Listings

- UL listed for damp locations
- Rated for ambient operating temperatures -40°F to 113°F


Installation

- Simple screw in installation
- Bypass ballast


Model Number	Base	Wattage	CCT	Lumens	IP	Voltage
ML-CLH-115W1A1-E39	E39	115W	5K	13,500Lm	IP64	100-277V

DIMENSIONS

115W

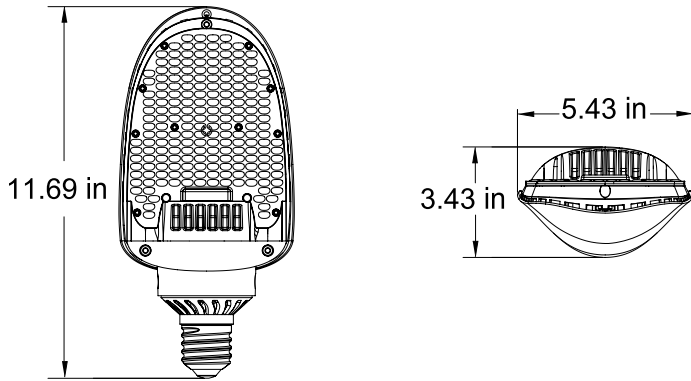


INSTALLATION DIAGRAM

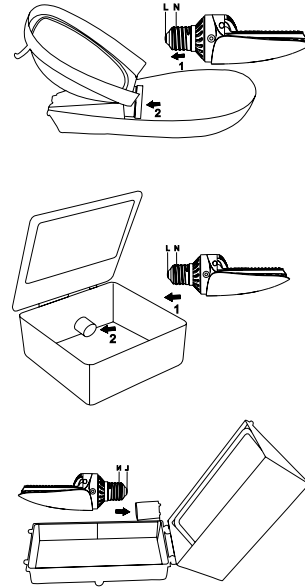


DISTRIBUTION DIAGRAM

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

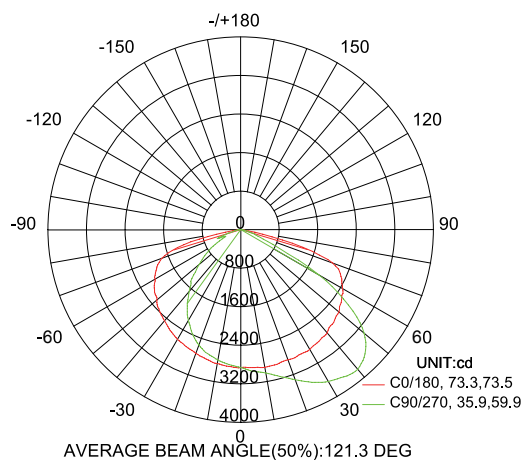

Flux out:5791 lm

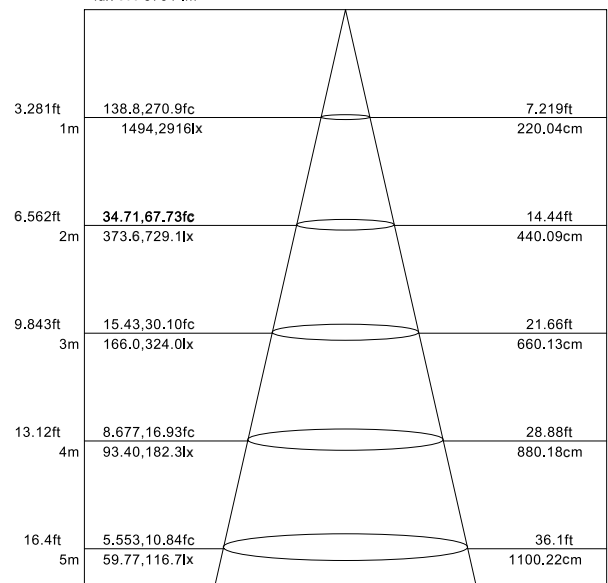

Height: avg, Emax Angle:95.46deg Diameter
Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.