



50W 4FT.



Key Features

- Energy-Efficient
- Environmentally Friendly
- Safe & Easy to Install

Lifespan

- Estimated 50,000 Hours LED lifespan based on IES LM-80 results and TM-21 calculations

Optics

- Light engines are available in standard 3K, 35K, 4K & 5K configurations
- Wattage Selectable:
4ft: 20W/30W/40W
8ft: 50W/60W/70W

Listings

- Damp locations

Electrical


- Input voltage: 120-277V
- Dimming: 0-10V
- THD: <20%
- Power Factor: >0.9
- Temperature: -40°F-113°F

Applications


- Offices/Hallways
- Warehouses
- Supermarkets
- Covered Parking Decks

Model Number	Length	Wattage	Lumens	CCT	Voltage	Dimming
ML-TR04-50W4FTBTA1	4'	Selectable 20W/30W/40W	145Lm/W	Selectable 3K/35K/4K/45K/5K/65K	120-277V	0-10V

DIMENSIONS

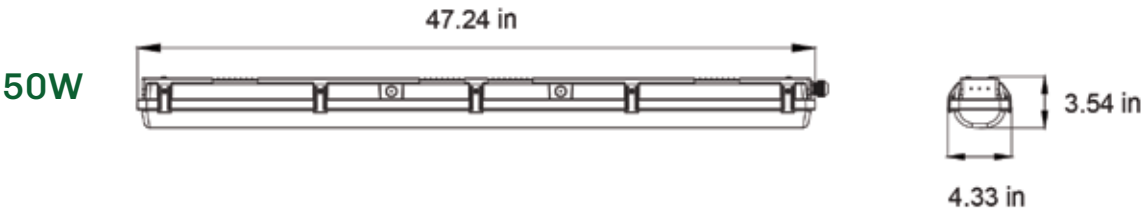


INSTALLATION DIAGRAM

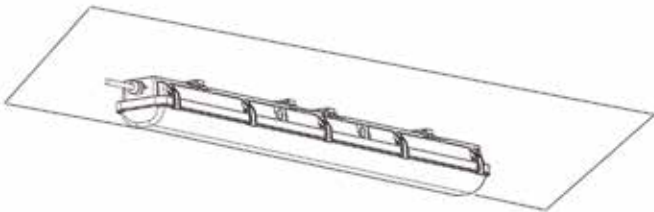

DISTRIBUTION DIAGRAM

Luminous Intensity Distribution Curve

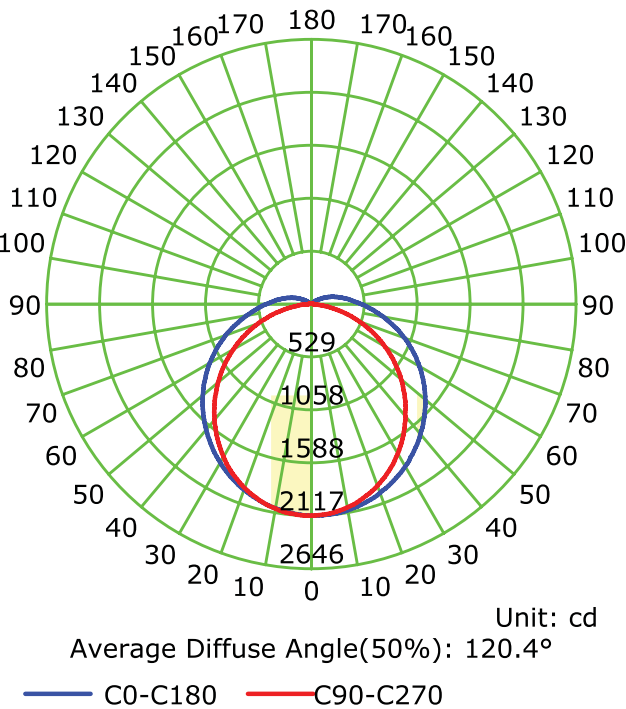

Illuminance at a Distance

