LED UFO High Bay

Series -HB18B



Key Features

- Safe & easy to install with ring for hang install or U bracket for wall or pipe install

Optics

- UHB18B/UHB23 series light engines are available in 3CCTs & 3 Wattage selectable configurations

Electrical

- Input Voltage: 120-277V
- Dimming: 0-10V
- THD: ≤20%
- Power Factor: ≥0.9
- Temperature: -40˚F to 122˚F

Lifespan

- Estimated 50,000 Hours LED lifespan based on IES LM-80 results and TM-21 calculations

Listings

- UL Listed: Wet Locations

Applications

- Warehouses
- Factories
- Supermarkets
- Exhibition Halls

Optional Accessories



Motion Sensor
ML-UFO-MS



Sensor Remote
ML-HB-R-MS



Surface Mount Bracket:
100W-150W-UFO Bracket & 240W-UFO Bracket



Emergency Driver:
ES-EIB301S

©2026 MetroLED Light & Sign, LLC. | All Rights Reserved | MetroLED.com
1750 Breckinridge Pkwy. Suite 200 | Duluth, GA 30096 | 888.533.7860 | info@metroled.com

MetroLED
LIGHT & SIGN


LED UFO High Bay

SPECIFICATIONS


Model Number	Wattage	CCT	Lumens	Housing	Voltage	CRI
ML-HB11-100WRXYD1	100W	N/A	14,000	Black	100-277V	>80
ML-HB18B-150WL1XYA1-W	Selectable 100W/120W/150W	Selectable 35K/4K/5K	140Lm/W		120-277V	
ML-HB18B-150WL1XYA1				White		
ML-HB18B-240WL1XYA1-W	Selectable 200W/220W/240W			Black		
ML-HB18B-240WL1XYA1				White		

DIMENSIONS


HB18B 150W



HB18B 240W




INSTALLATION DIAGRAM

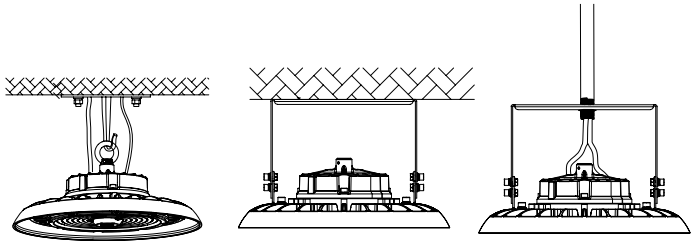


DISTRIBUTION DIAGRAM

Luminous Intensity Distribution Curve

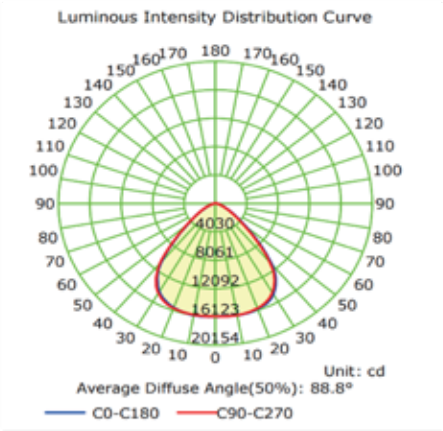

Illuminance at a Distance

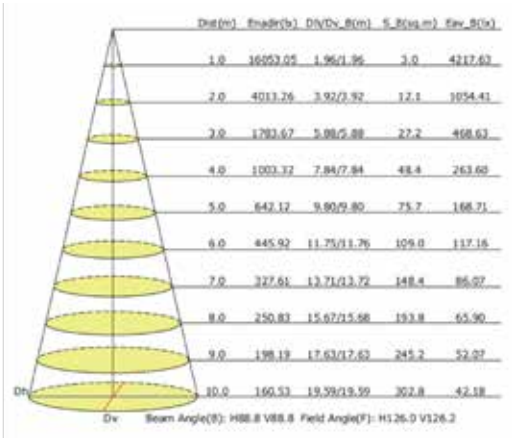

©2026 MetroLED Light & Sign, LLC. | All Rights Reserved | MetroLED.com
1750 Breckinridge Pkwy. Suite 200 | Duluth, GA 30096 | 888.533.7860 | info@metroled.com